

TOYANI

STAND ALONE DIGITAL SIGNAGE



TOYANI

DIGITAL SIGNAGE



model	43" E4301STD	49" E490STD	55"	43"	55"
parameter					
install	Floor Stand	Floor Stand	Floor Stand	Wall-mounted	Wall-mounted
size	43	49	55	43	55
dimension	626.5W*1800*52DMM	723.4W*1800*48DMM	855W*1800H*425DMM	1014W*636H*55DMM	1294W*785H*58DMM
ratio	16:09	16:09	16:09	16:09	16:09
brightness	450cd/m ²	450cd/m ²	450cd/m ²	450cd/m ²	450cd/m ²
contrast	4000:1	4000:1	4000:1	4000:1	4000:1
resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080
color saturature	97%	97%	97%	97%	97%
view angle	178°	178°	178°	178°	178°
response time	6.5S	6.5S	6.5S	6.5S	6.5S
power supply	90-240V	90-240V	90-240V	90-240V	90-240V
audio output	2*10Wtrumpet	2*10Wtrumpet	2*10Wtrumpet	2*10Wtrumpet	2*10Wtrumpet
interface	USB	USB	USB	USB	USB
Usb format	FAT32/NTFS	FAT32/NTFS	FAT32/NTFS	FAT32/NTFS	FAT32/NTFS
video format	RM,MPEG2,MPEG4,H264,RM,RMVB,MOV,MJPEG,VC1,FLV				
audio format	WMA,MP3,M4A				
picture format	JPEG、BMP、PNG	JPEG BMP PNG	JPEG BMP PNG	JPEG BMP PNG	JPEG BMP PNG
roaming text	support up to 1000words	support up to 1000words	support up to 1000words	support up to 1000word	support up to 1000words
video splitter	video splitter	video splitter	video splitter	video splitter	video splitter
RTC	time date display	time date display	time date display	time date display	time date display
working temp	0-40°C	0-40°C	0-40°C	0-40°C	0-40°C
work humidity	20-85%	20-85%	20-85%	20-85%	20-85%
standby temp	0-40°C	0-40°C	0-40°C	0-40°C	0-40°C
standby humidity	30-85%	30-85%	30-85%	30-85%	30-85%

WINDOWS SYSTEM DIGITAL SIGNAGE

INTERACTIVE TABLE TOUCH SCREEN, WALL-MOUNTED & FLOOR STAND

FHD display , support horizontal/vertical display
 interactive optical multi-point touch screen
 intelligent operation system
 can be actualized with interactive touch and guidance
 aluminium frame and tempered glass surface




Model	TF32	TF42	TF50	TF65	TW32	TW42	TW50	TW55	TW65	TW70	TW84	TFS42	TFS50	TFS55	
installation	table	table	table	table	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	floor stand	floor stand	floor stand	
screen size	32	42	50	65	32	42	50	55	65	70	84	42	50	55	
demension(mm)	767*464*75	1003*592*76	1167*690*76	1501*875*76	767*464*75	1003*592*76	1167*690*76	1286*758*76	1501*875*76	1615*941*76	1764*1012*87	1790*632*80	1920*728*80	1970*800*80	
effective(mm)	698*392	930*523	1096*616	1428*804	698*392	930*523	1096*616	1209*680	1428*804	1539*865	1860*1046	930*523	1096*616	1209*680	
resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	3840*2160	1920*1080	1920*1080	1920*1080	
response time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	
view angle	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	
aspect ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	
color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	
brightness	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	
contrast	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	
CPU	Intel 1037U (i3/i5/i7 optical)														
memory	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	
hardisk	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	
system	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	
IR touch point	2 finger(4/6finger optical)														
response time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	
working temp	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	
Working Humidity	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	
interface	USB/VGA/HDMI/RJ45							USB/VGA/HDMI/RJ45				USB/VGA/HDMI/RJ45			
wifi	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	
video format	MPEG-1、MPEG-2、WMV9、AVI(3.11)、XVID、H264、1080P/60							MPEG-1、MPEG-2、WMV9、AVI(3.11)、XVID、H264、1080P/60							
audio format	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	
picture format	JPEG、BMP、PNG							JPEG、BMP、PNG				JPEG、BMP、PNG			
power	AC 100~240V 50/60Hz , ≤130W							AC 100~240V 50/60Hz , ≤130W				AC 100~240V 50/60Hz , ≤130W			
weight	54	66	86	110	24	36	56	62	83	95	137	54	74	80	
packing	screen 895*575*150; base1030*550*500	screen1120*715*175; base1030*550*500	screen1450*910*195; base1030*550*500	screen1480*1058*200; base1030*550*500	895*575*150	1120*715*175	1450*910*195	1480*1058*200	1744*1100*200	1842*1164*240	1964*1212*207	1990*832*200	2120*928*200	2170*1000*200	

ANDROID SYSTEM DIGITAL SIGNAGE

WI-FI, LAN, HDMI, & USB Input



Support Landscape and vertical display,screen rotation
Automatic circulation display ,time-power-off support
Subtitle shows
FHD display
Work 7/24
Ultra-thin fuselage, aluminum alloy case, industrial structure design
(Available for Touch Function)

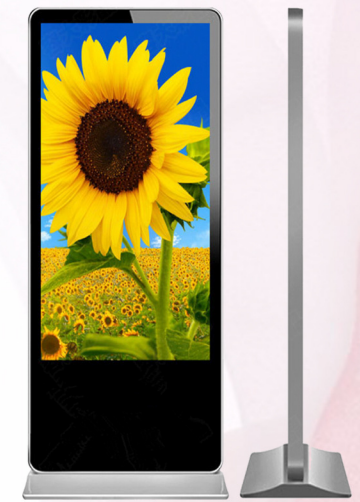

Model	EW19	EW22	EW32	EW42	EW47	EW50	EW55	EW65	EW70	EF42	EF50	EF55	EF65	EF70
installation	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	floor stand	floor stand	floor stand	floor stand	floor stand
screen size	19	22	32	42	47	50	55	65	70	42	50	55	65	70
demension(mm)	460*285*38	526*322*38	772*468*56	1018*611*56	1116*670*56	1167*688*56	1286*758*56	1544*910*56	1642*964*56	1790*632*80	1920*728*80	1970*800*80	2130*936*80	2180*1009*80
effective(mm)	409*229	475*267	698*392	930*523	1040*585	1096*616	1209*680	1428*804	1550*872	930*523	1096*616	1209*680	1428*804	1550*872
resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080
aspect ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9
color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
brightness	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2
contrast	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1
CPU	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3
memory	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G
system	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2
wifi	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN	802.11 1x1 BGN
response time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms
view angle	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°
working temp	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°
Working Humidity	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%
video format	MPEG-1、MPEG-2、WMV9、AVI(3.11)、XVID、H264、1080P/60													
audio format	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA
picture format	JPEG、BMP、PNG													
interface	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1
power	AC 100~240V, ≦40W													
weight(kg)	15	17	22	34	44	54	60	80	90	54	74	80	100	110
packing	590*405*115	660*440*115	895*575*150	1120*715*175	1300*810*185	1450*910*195	1480*1058*200	1744*1100*200	1842*1164*240	1990*832*200	2120*928*200	2170*1000*200	2330*1136*200	2380*1209*200

STAND ALONE DIGITAL SIGNAGE

USB Disk Play Video & Picture

Model	DW19	DW22	DW32	DW42	DW47	DW50	DW55	DW65	DW70	DF42	DF50	DF55	DF65	DF70
installation	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	floor stand	floor stand	floor stand	floor stand	floor stand
screen size	19	22	32	42	47	50	55	65	70	42	50	55	65	70
demension(mm)	460*285*38	526*322*38	772*468*56	1018*611*56	1116*670*56	1167*688*56	1286*758*56	1544*910*56	1642*964*56	1790*632*80	1920*728*80	1970*800*80	2130*936*80	2180*1009*80
display size(mm)	409*229	475*267	698*392	930*523	1040*585	1096*616	1209*680	1428*804	1550*872	930*523	1096*616	1209*680	1428*804	1550*872
resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080
color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
brightness	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2
contrast	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1
response time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms
working temp	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°
Working Humidity	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%
video format	MPG、MPG-1、MPG-2、MPG-4、AVI、MP4、DIV、TS、TRP、MKV、MOV、WMV、RM、RMVB													
audio format	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA
picture format	JPEG、BMP、PNG													
interface	USB	USB	USB	USB	USB	USB	USB	USB	USB	USB	USB	USB	USB	USB
power	AC 100~240V, ≦40W													