


# EIKI



- CPU A55X4 1.9GHZ
- GPU G52 MP2
- 4GB DDR4 RAM
- 32GB ROM
- 4K UHD
- Abundant Connectivity

## T Series Interactive Flat Panels

55 65 75 86 98 inch

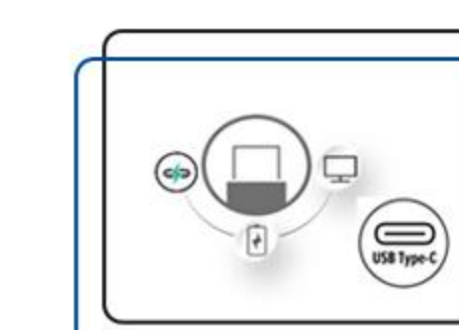


Latest USB-C



40 Points Touch  
Android & Windows OS



Android 11

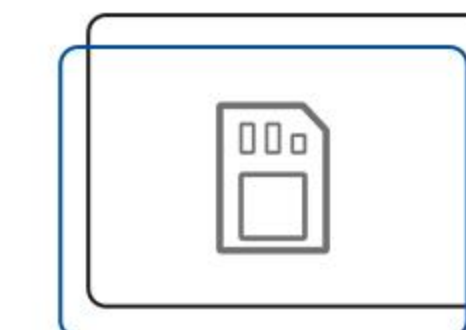

RAM:4GB  
ROM:32GB



Wireless Miracast

# High Efficient Video Conference



## Dual whiteboard display

### Eye Protection Mode

Reduce the bluehight to protect eyes

-   
 Tempered glass protection
-   
 Mohs 7 hardness
-   
 Eye Protection



### Intelligent whiteboard

Hand writing recognition Split whiteboard mode  
 Abundant graph and chart  
 Compatible with Office files like WORD, EXCEL, PPT  
 Play audio/video or web browser, Youtube



### Wireless Miracast

Start your brainstorming easily  
 Share your devices without cables  
 Share your mobile device via NFC(optional)




# Fashion Design



Ultra thin Bezel & Narrow Body



Easy connection  
Full USB-C with charging function

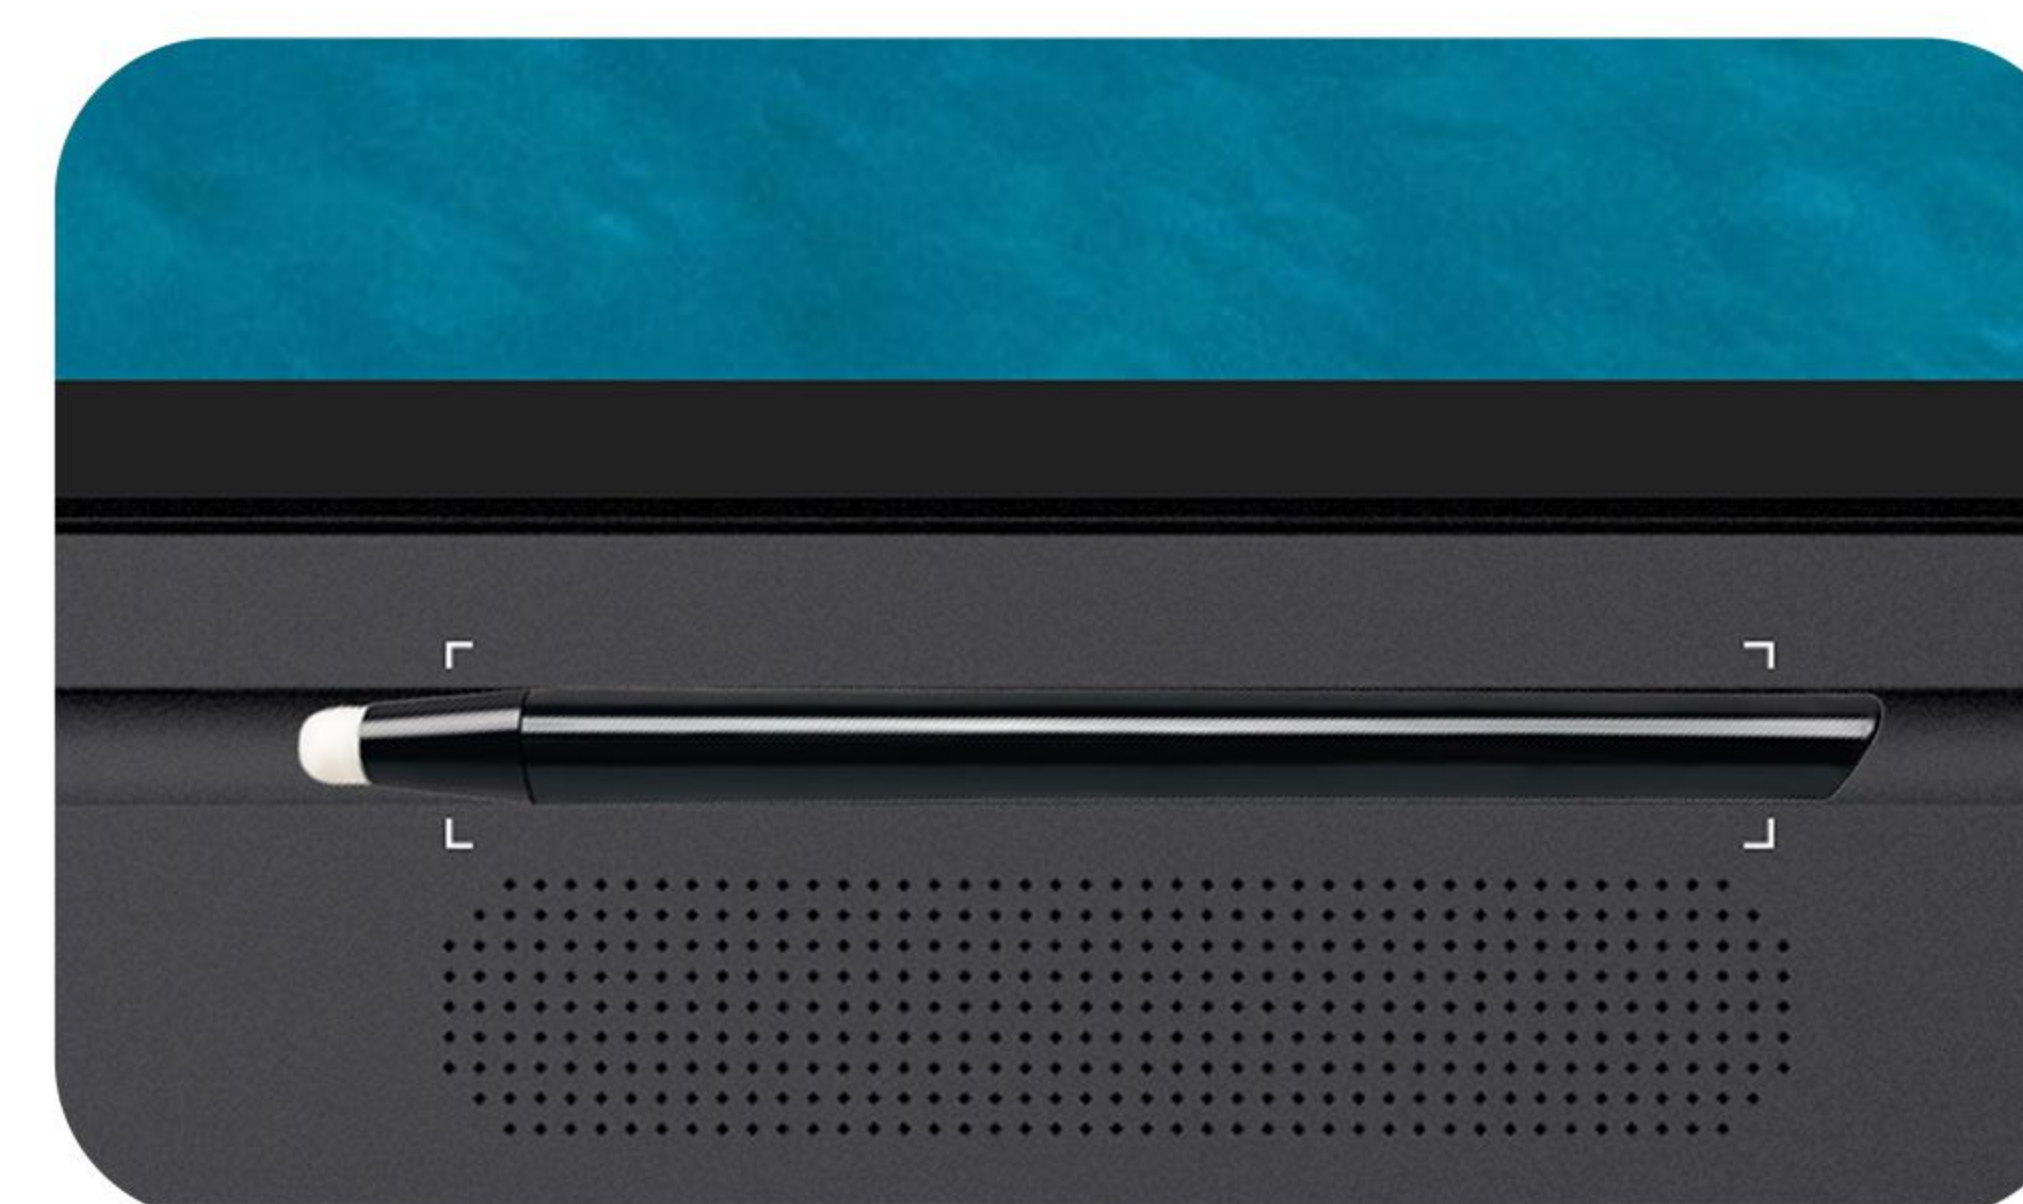

Magnetic suction slot



Rich interface can expand more devices



## Friendly User Interface

Chose the right display size to get everywhere easily



## Last generation USB-C

Transmission freely charging



## Compatible multi OS

Compatible with Windows/Android/MAC/Chrome OS

UHD 4K UI Design  
Display more vivid



Surround speakers for clearer sound



Interactive Flat Panel (T Series )						
Model		DT-I55HT	DT-I65HT	DT-I75HT	DT-I86HT	DT-I98HT
Display Parameter	Diagonal Size	55inch	65inch	75inch	86inch	98inch
	Effective Display Area	1209.6(H)*680.4(V)	1428.48(H)*803.52(V)	1650.24(H)*928.26(V)	1895.04(H)*1065.96(V)	2158.85(H)*1214.35(V)
	Display Ratio	16:9	16:9	16:9	16:9	16:9
	Brightness	300cd/m <sup>2</sup>	320cd/m <sup>2</sup>	350cd/m <sup>2</sup>	350cd/m <sup>2</sup>	350cd/m <sup>2</sup>
	Contrast Ratio	4000:1	4000:1	4000:1	4000:1	1200:1
	Backlight Type	DLED	DLED	DLED	DLED	DLED
	Viewing Angle	178°(V)/178°(H)	178°(V)/178°(H)	178°(V)/178°(H)	178°(V)/178°(H)	178°(V)/178°(H)
	Resolution	3840 (H) X 2160(V)	3840 (H) X 2160(V)	3840 (H) X 2160(V)	3840 (H) X 2160(V)	3840 (H) X 2160(V)
Audio Output Power	8Ω/10W*2	8Ω/10W*2	8Ω/10W*2	8Ω/10W*2	8Ω/10W*2	
Back port	Input	LAN IN	1	1	1	1
		AV IN	1	1	1	1
		HDMI 2.0	2	2	2	2
		RS-232	1	1	1	1
		USB 3.0	1	1	1	1
	OUT	USB 2.0	1	1	1	1
		TF-CARD	1	1	1	1
		AV OUT	1	1	1	1
		Earphone	1	1	1	1
		coaxial(RCA)	1	1	1	1
TOUCH OUT	1	1	1	1		
HDMI OUT	1	1	1	1		
Front port and function	USB3.0	3	3	3	3	3
	HDMI 2.0	1	1	1	1	1
	USB TOUCH	1	1	1	1	1
	Type-C full function recovery system	1	1	1	1	1
	Light sense	1	1	1	1	1
	Power Button On/Off	1	1	1	1	1
Android Specs	Android Frequency	Quad core ARM Cortex-A55	Quad core ARM Cortex-A55	Quad core ARM Cortex-A55	Quad core ARM Cortex-A55	Quad core ARM Cortex-A55
	System Version	Android 11	Android 11	Android 11	Android 11	Android 11
	DDR4 RAM	4GB	4GB	4GB	4GB	4GB
	FLASH Memory	32GB	32GB	32GB	32GB	32GB
	WIFI	2.4G/5G	2.4G/5G	2.4G/5G	2.4G/5G	2.4G/5G
	Transmission screen WIFI	5G	5G	5G	5G	5G
Others	Power consumption of the whole machine (excluding OPS)	≤120W	≤160W	≤280W	≤380W	≤400W
	Standby consumption	≤0.5W	≤0.5W	≤0.5W	≤0.5W	≤0.5W
	Lifetime	50000 hours	50000 hours	50000 hours	50000 hours	50000 hours
	power supply	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
	Demission	1267.8*789.9*93.44mm	1486*913.2*93.64mm	1717.4*1056.3*100.3mm	1962.2*1194.1*100.3mm	2220*1324*105.7mm
	VESA hole site	4-M8 hole site 400mm*400mm	4-M8 hole site 400mm*400mm	4-M8 hole site 600mm*400mm	4-M8 hole site 600mm*400mm	4-M8 hole site 900mm*600mm
	Net Weight	28kg	38kg	57kg	74.2kg	87.1kg
	Gross Weight	32.4kg	46kg	70kg	91kg	111kg
Touch screen	Touch technology	Multiple Infrared scanning technology	Multiple Infrared scanning technology	Multiple Infrared scanning technology	Multiple Infrared scanning technology	Multiple Infrared scanning technology
	Touch type	40 points touch	40 points touch	40 points touch	40 points touch	40 points touch
	Drive Mode	HID Free drive	HID Free drive	HID Free drive	HID Free drive	HID Free drive
	Writing surface material	3mm anti glare tempered glass	4mm anti glare tempered glass	4mm anti glare tempered glass	4mm anti glare tempered glass	4mm anti glare tempered glass
	Touch Screen Sensor Mode	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium
	Resolution of touch screen	32768X32768	32768X32768	32768X32768	32768X32768	32768X32768
	Communication Port	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0
	Minimum Recognition Point Size	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm
	ResponseTime (SingleTouch)	≤5ms	≤8ms	≤8ms	≤8ms	≤8ms
	Touch Accuracy	±1mm	±1mm	±1mm	±1mm	±1mm
	Anti-Interference	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux
	Calibration	Calibration free	Calibration free	Calibration free	Calibration free	Calibration free
	Touch Time	More than 60 million times in the same position	More than 60 million times in the same position	More than 60 million times in the same position	More than 60 million times in the same position	More than 60 million times in the same position
	Touch Power supply Mode	USB 5.0V power supply	USB 5.0V power supply	USB 5.0V power supply	USB 5.0V power supply	USB 5.0V power supply
Accessories	Wall-Mount	1pcs	1pcs	1pcs	1pcs	1pcs
	Pen	1pcs	1pcs	1pcs	1pcs	1pcs
	power cable	1pcs	1pcs	1pcs	1pcs	1pcs
	Remote control	1pcs	1pcs	1pcs	1pcs	1pcs
PC (Optional)	PC Option	H81/H110/H310 Mainboard	H81/H110/H310 Mainboard	H81/H110/H310 Mainboard	H81/H110/H310 Mainboard	H81/H110/H310 Mainboard
	Input Volage	18V DC	18V DC	18V DC	18V DC	18V DC
	Rated Output Current	5A	5A	6A	6A	6A
	Peak Output Current	6A	6A	8A	8A	8A
	Rated Load Power	90W	90W	108W	108W	108W
	Interface	Canform to Intel® OPS-C JAE 80-pin connector				
National standard OPS size	L194.6*W179.8*H42mm (42mm or 30mm)					
European standard OPS size	L180*W119*H30mm					